

ПРИЛОЖЕНИЕ 2  
техническа спецификация охранителна камера

**HIKVISION**

**DS-2CD1121-I**  
**2.0 MP CMOS Network Dome Camera**



2.8 mm Fixed Focal Lens



Non 2.8 mm Fixed Focal Lens



**Key Features**

- 1/2.8" progressive scan CMOS
- Up to 2.0 megapixel
- 2.8 mm/4 mm/6 mm fixed focal lens
- Up to 30 m IR range
- Dual stream
- Digital WDR (Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- PoE (Power over Ethernet)
- IP67, IK10
- Mobile monitoring via Hik-Connect or iVMS-4500

**ГЕЙТ.БГ ЕООД**  
гр. Русе, бул. Цар Освободител 11А  
office@gate.bg, +359 888 864628  
[www.gate.bg](http://www.gate.bg)  
00359888864628



[www.hikvision.com](http://www.hikvision.com)

## Specification


<b>Camera</b>	
Image Sensor	1/2.8" progressive scan CMOS
Min. Illumination	Color: 0.01 Lux @(F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100, 000 s, support slow shutter
Lens	2.8 mm @F2.0, horizontal field of view 105°, 4 mm @F2.2, horizontal field of view 84° 6 mm @F2.0, horizontal field of view 55°
Lens Mount	M12
Day & Night	IR cut filter with auto switch
2-Axis Adjustment	Pan: 0° to 355°, tilt: 0° to 70°
DNR (Digital Noise Reduction)	3D DNR
WDR (Wide Dynamic Range)	Digital WDR
<b>Compression Standard</b>	
Video Compression	Main stream: H.264+/H.264 Sub stream: H.264/MJPEG
H.264 Type	Baseline profile/Main profile
Video Bit Rate	32 Kbps to 8 Mbps
<b>Image</b>	
Max. Resolution	1920 × 1080
Main Stream	50Hz: 25fps @(1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps @(1920 × 1080, 1280 × 960, 1280 × 720)
Sub-stream	50Hz: 25fps @(704 × 576, 640 × 480, 352 × 288, 320 × 240) 60Hz: 30fps @(704 × 480, 640 × 480, 352 × 240, 320 × 240)
Image Settings	Brightness, saturation, contrast, sharpness are adjustable via web browser or client software
Day/Night Switch	Support auto, scheduled
Others	Mirror, BLC (area configurable), region of interest (support 1 fixed region)
<b>Network</b>	
Network Storage	NAS (NFS, SMB/CIFS)
Detections	Motion detection
Alarms	Video tampering, network disconnected, IP address conflicted
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Reset	Support
<b>General</b>	
Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)
Power Supply	12 V DC ± 25%, PoE (802.3af)
Power Consumption	Max. 5 W
Protection Level	IP67, IK10
IR Range	Up to 30 m
Dimensions	Φ 111 mm × 82 mm (4.4" × 3.2")
Weight	500 g (1.1 lb.)

**ГЕИТ.БГ ЕООД**  
 гр. Русе, бул. Цар освободител  
 office@gate.bg, +359 888 864628  
 WWW.GATE.BG

## Available Models

DS-2CD1121-I

## Dimension

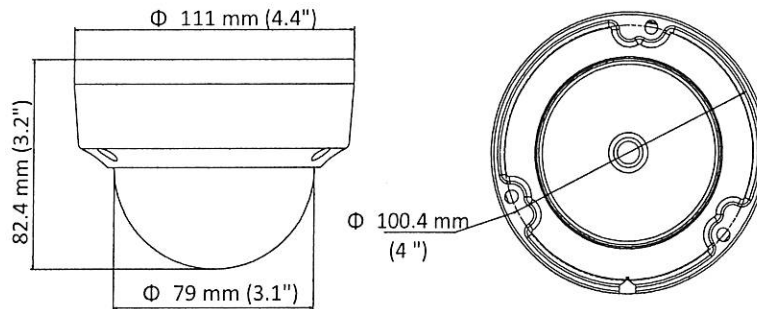


## Accessory




DS-1259ZJ  
Inclined Base Mounting Bracket



DS-1275ZJ  
Vertical Pole Mounting Bracket



DS-1272ZJ-110  
Wall Mounting Bracket



DS-1272ZJ-110B  
Wall Mounting Bracket



DS-1271ZJ-110  
Pendant Mounting Bracket



DS-1276ZJ  
Corner Mounting Bracket



DS-1280ZJ-DM18  
Junction Box



DS-1250ZJ  
Rain Shade

Distributed by



# HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8607-5956  
 overseasbusiness@hikvision.com

**Hikvision USA**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision Europe**  
 T +31-23-55 42 770  
 info.eu@hikvision.com

**Hikvision Middle East**  
 T +971-4 8618096  
 salesme@hikvision.com

**Hikvision Russia**  
 T +7-495-669-87-99  
 salesru@hikvision.com

**Hikvision India**  
 T +91-22-28469000  
 sales@gramahikvision.com

**Hikvision Italy**  
 T +39-0438-6902  
 info.it@hikvision.com

**Hikvision France**  
 T +33(0)1 85 330 400  
 info.fr@hikvision.com

**Hikvision Spain**  
 T +34-31-727-16-65  
 info.es@hikvision.com

**Hikvision Poland**  
 T +48-22-460-01-60  
 poland@hikvision.com

**Hikvision UK**  
 T +01628-902140  
 support.uk@hikvision.com

**Hikvision Singapore**  
 T +65-6884-4718  
 sg@hikvision.com

**Hikvision Oceania**  
 T +61-2-8594-4233  
 salesau@hikvision.com

**Hikvision Canada**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision Korea**  
 T +82-31-731-8941  
 sales.korea@hikvision.com

**Hikvision Brazil**  
 T +55-11-3318-0950  
 Latam.support@hikvision.com

**Hikvision Africa**  
 T +27 (0)1 0351172  
 sale.africa@hikvision.com

**Hikvision Hong Kong**  
 T +86-2151-1761

